

FL5200 LED Fiberoptic Illuminator No Twinkle Wheel

PART NUMBER

FL5200	MW	30	H	NT
	Device Color	Fiber Port Size	Homogenizer	Twinkle Wheel
	MW Mixed RGBW	30 30mm	H With homogenizer	NT No Twinkle Wheel

SPECIFICATIONS

FEATURES

UL Listed
 Stand-alone operable
 Manual, 0-10V and DMX controllable
 Mixed Color

ELECTRICAL

Input Voltage: 100V-240V AC
 Power Consumption: 120W Max

OPERATING ENVIRONMENT





Ingress Protection: IP20
 Exposure: Dry location
 Operating Temperature: 0° to 40°C
 Storage Temperature: -40° to 70°C
 Airflow: 36 cfm
 Acoustic Noise: 31 dBA

MECHANICAL

Material/Finish: Black iron plate
 Weight: 8.4 lbs
 Dimensions: 11.8" x 5.3" x 4.3"
 AC input connector: IEC 60320 C14

MOUNTING

OK to mount in any orientation
 Best orientation is with exhaust vent facing up
 Keep vents free from obstruction

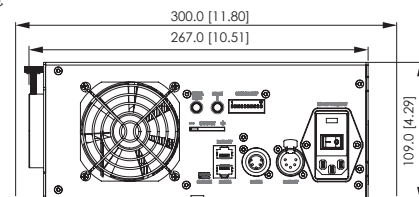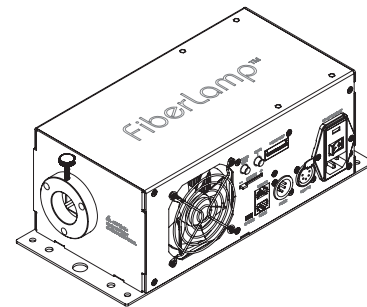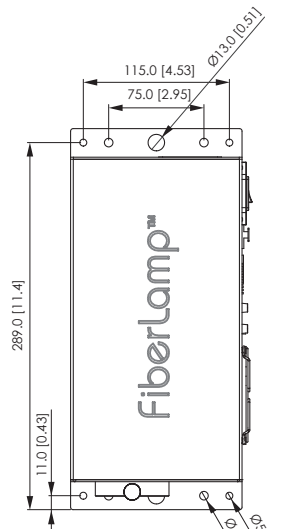

Unit: mm [inch]



070825A