

FL5600 LED Fiberoptic Illuminator No Twinkle Wheel

PART NUMBER

FL5600	MW	30	H	NT	PSU
	<u>Device Color</u>	<u>Fiber Port Size</u>	<u>Homogenizer</u>	<u>Twinkle Wheel</u>	
	MW Mixed RGBW	30 30mm	H With homogenizer	NT No Twinkle Wheel	

SPECIFICATIONS

FEATURES

UL Listed for Wet locations
 Stand-alone operable
 Manual, 0-10V and DMX controllable
 Mixed Color

ELECTRICAL

Input Voltage: 24V DC
 Power Consumption: 120W Max

OPERATING ENVIRONMENT


Ingress Protection: IP65
 Exposure: Outdoor
 Operating Temperature: 0° to 40°C
 Storage Temperature: -40° to 70°C
 Airflow: 36 cfm
 Acoustic Noise: 33 dBA

MECHANICAL

Material/Finish:
 Black anodized aluminum, black iron plate
 Weight: 9 lbs
 Dimensions: 11.1" x 8.5" x 4.4"
 DC input cord length: 6 ft

MOUNTING

OK to mount in any orientation
 Best orientation is with exhaust vent facing up
 Keep vents free from obstruction

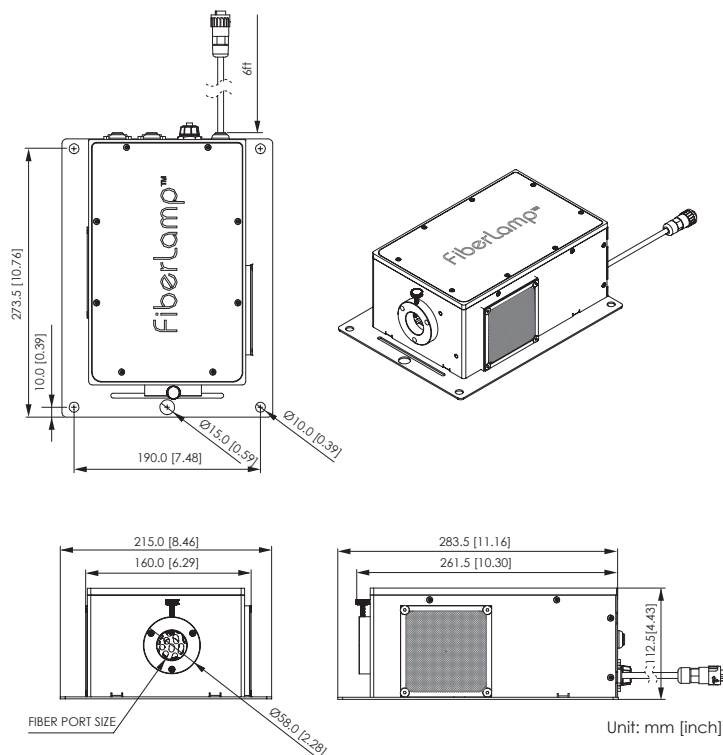

070825A