

FL5600 LED Fiberoptic Illuminator With Twinkle Wheel

PART NUMBER

FL5600	—	MW	—	30	—	H	—	TW	—	PSU
		<u>Device Color</u>		<u>Fiber Port Size</u>		<u>Homogenizer</u>		<u>Twinkle Wheel</u>		
		MW Mixed RGBW		30 30mm		H With homogenizer		TW With Twinkle Wheel		

SPECIFICATIONS

FEATURES

UL Listed for Wet locations
 Stand-alone operable
 Manual, 0-10V and DMX controllable
 Mixed Color

ELECTRICAL

Input Voltage: 24V DC
 Power Consumption: 120W Max

OPERATING ENVIRONMENT


Ingress Protection: IP65
 Exposure: Outdoor
 Operating Temperature: 0° to 40°C
 Storage Temperature: -40° to 70°C
 Airflow: 36 cfm
 Acoustic Noise: 33 dBA

MECHANICAL

Material/Finish:
 Black anodized aluminum, black iron plate
 Weight: 9 lbs
 Dimensions: 11.1" x 8.5" x 4.4"
 DC input cord length: 6 ft

MOUNTING

OK to mount in any orientation
 Best orientation is with exhaust vent facing up
 Keep vents free from obstruction

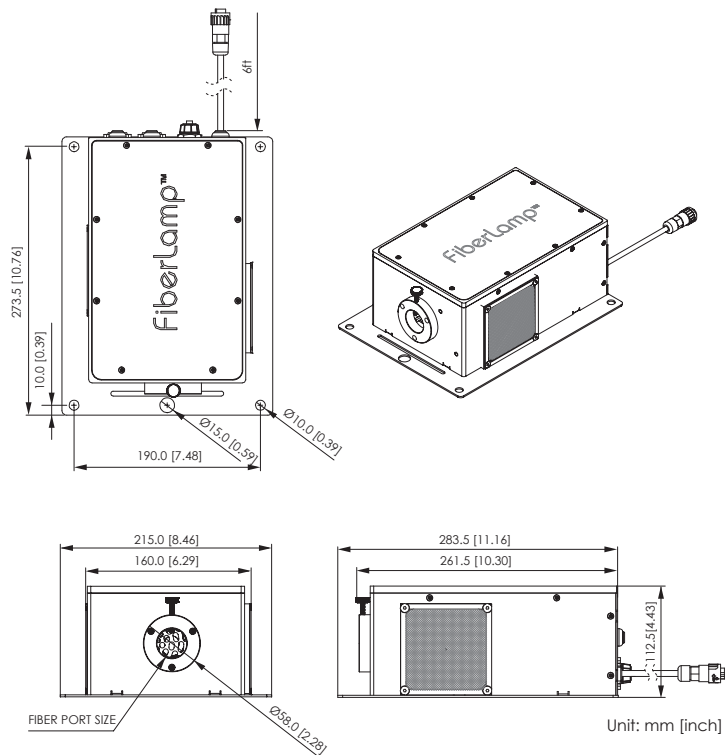

070825A