



cielux O-Type Track

2 Circuit Data Track - TOX Configuration

TRACK CROSS SECTION

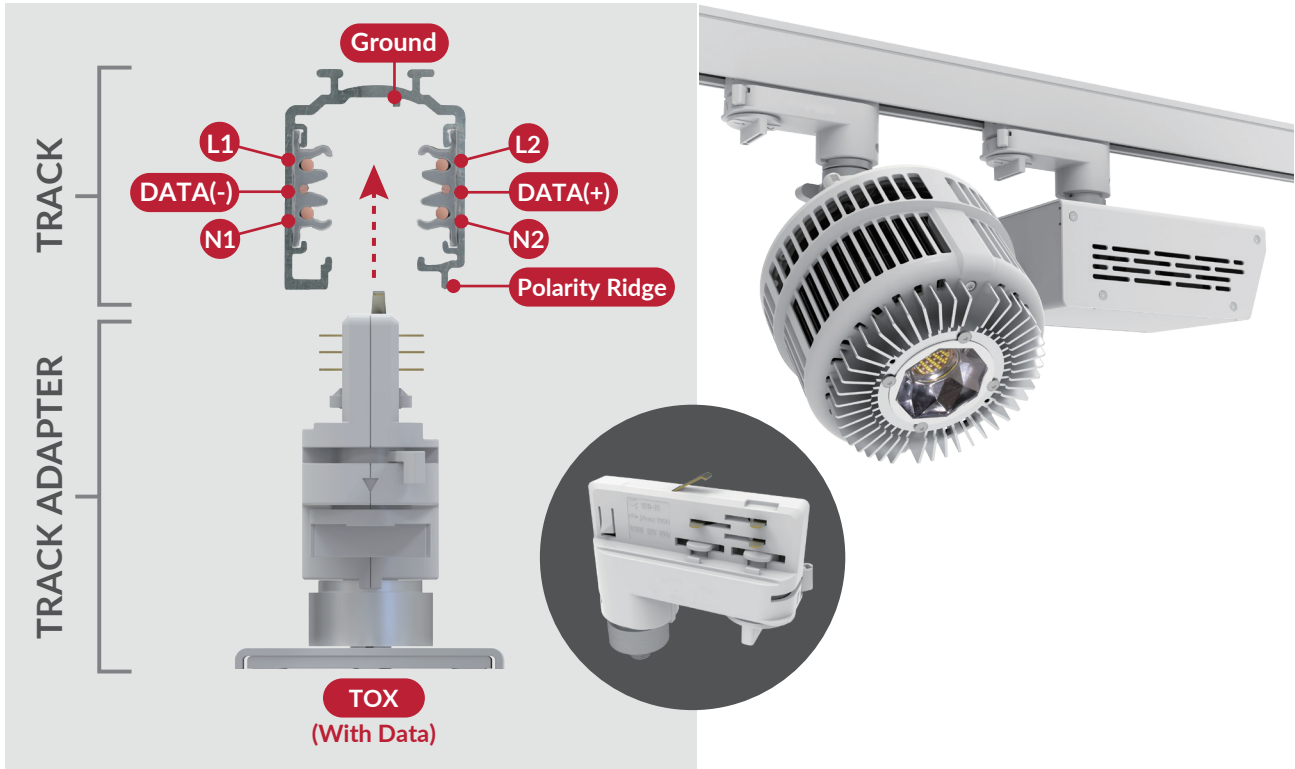


Custom Lengths

Track segments can be cut on location



Mounting Points

Pre-drilled slots for easy mounting



DMX Ready

Supports up to 30 DMX devices

TRACK SPECIFICATION

Track Type	Surface Mounted Track (commercial grade)
Conductors	7 (2 Data, 2 Live, 2 Neutral, 1 Ground)
Input Voltage	120V
Circuits	2 (20A max per circuit, 40A max per track)
Material	Aluminum / PVC / Polycarbonate / Copper conductors
Number of DMX Fixtures	30 Max
Color Options	Black / White
Segment Length Options	4ft / 8ft
Track Mounting Points	0.47" x 0.16" (11mm x 4mm) Slot Per 1.64' (500mm)

TRACK SEGMENTS

120V, 2 Circuits with Data


4FT BLACK : 9000-UL4/B-ST2-120
WHITE : 9000-UL4/W-ST2-120

8FT BLACK : 9000-UL8/B-ST2-120
WHITE : 9000-UL8/W-ST2-120

cielux O-Type Track

2 Circuit Track - TON Configuration

TRACK CROSS SECTION

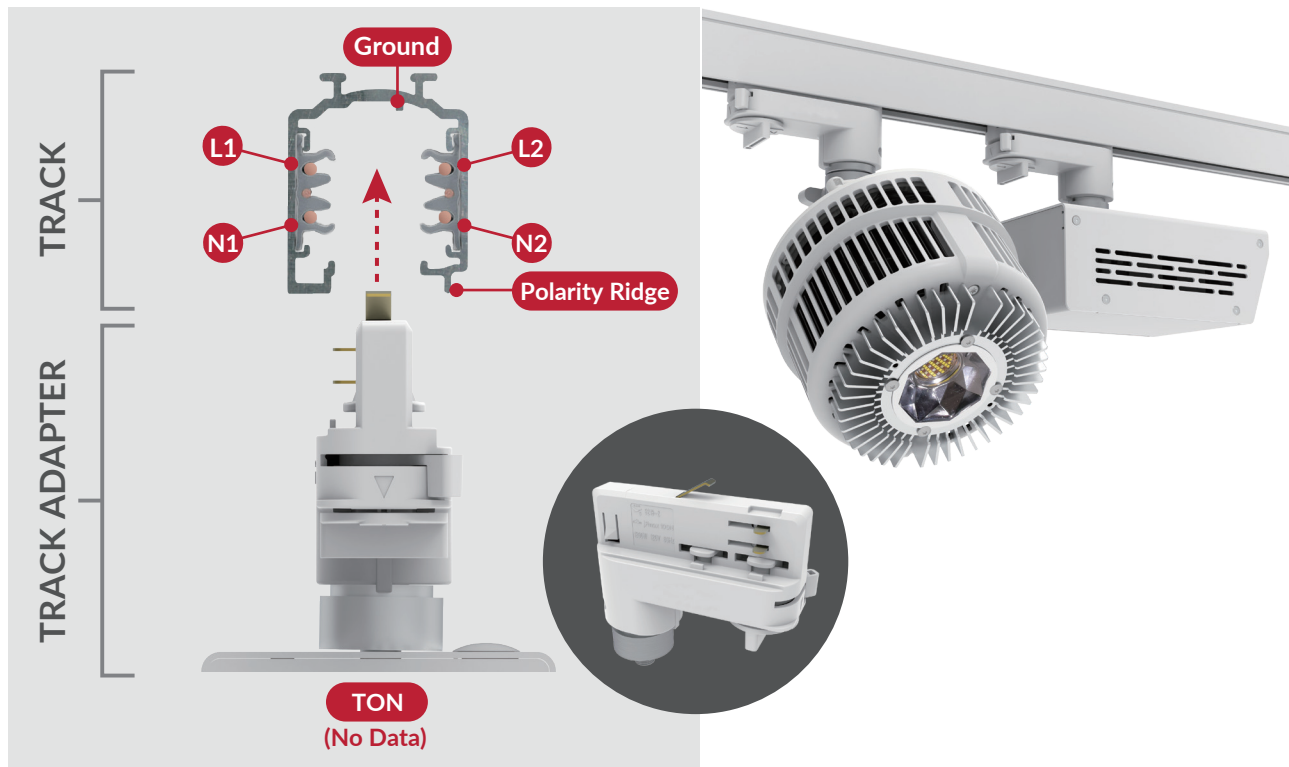


Custom Lengths

Track segments can be cut on location



Mounting Points

Pre-drilled slots for easy mounting



TRACK SPECIFICATION

Track Type	Surface Mounted Track (commercial grade)
Conductors	7 (2 Live, 2 Neutral, 1 Ground, 2 Data (unused))
Input Voltage	120V
Circuits	2 (20A max per circuit, 40A max per track)
Material	Aluminum / PVC / Polycarbonate / Copper conductors
Number of DMX Fixtures	30 Max
Color Options	Black / White
Segment Length Options	4ft / 8ft
Track Mounting Points	0.47" x 0.16" (11mm x 4mm) Slot Per 1.64' (500mm)

TRACK SEGMENTS

120V, 2 Circuits


4FT

BLACK : 9000-UL4/B-ST2-120
WHITE : 9000-UL4/W-ST2-120

8FT


BLACK : 9000-UL8/B-ST2-120
WHITE : 9000-UL8/W-ST2-120

POLARITY RIDGE

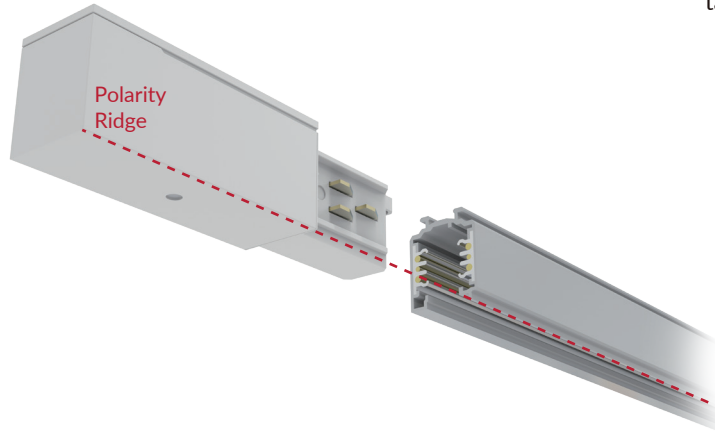

There is a mechanical key on the track to guarantee the proper connection of multiple pieces of track. This key is present on all end-feeds and connecting components (see screw below-pictured). Care must be taken when ordering to select the correct components.

Screw location indicates polarity side



Polarity ridge - floor view

COMPONENTS



End Feed

Polarity Left

BLACK : 9002/B-2C WHITE : 9002/W-2C



End Feed

Polarity Right

BLACK : 9001/B-2C WHITE : 9001/W-2C



Straight Coupler with Feed

Power Feed

BLACK : 9010/B-2C WHITE : 9010/W-2C

Can be oriented both sides



L-Coupler

Polarity Inside

BLACK : 9011/B-2C WHITE : 9011/W-2C



L-Coupler

Polarity Outside


BLACK : 9012/B-2C WHITE : 9012/W-2C



End Cap

BLACK : 9004/B WHITE : 9004/W

Can be oriented both sides



Flex Coupler

Polarity and Power Feed

BLACK : 9018/B-2C WHITE : 9018/W-2C

30° - 330° mobility range

Can be oriented both sides



DMX Terminator

BLACK : 9219-2S/B-DMX

WHITE : 9219-2S/W-DMX

For use in 2 Circuit 120v/277v mode